

User Guide

AX5400 Wi-Fi 6 Router Archer AX73

Contents

Abou	ut This Guide	1
Chap	oter 1. Get to Know About Your Router	3
1. 1.	Product Overview	4
1. 2.	Appearance	4
	1. 2. 1.Top Panel	4
	1. 2. 2.Back Panel	5
	1. 2. 3.Side Panel	6
Chap	oter 2. Connect the Hardware	7
2. 1.	Position Your Router	8
2. 2.	Connect Your Router	
Chap	oter 3. Log In to Your Router	11
Chap	oter 4. Set Up Internet Connection	13
4. 1.	Use Quick Setup Wizard	. 14
4. 2.	Quick Setup Via TP-Link Tether App	. 14
4. 3.	Manually Set Up Your Internet Connection	
4. 4.	Set Up the Router as an Access Point	
4. 5.	Set Up an IPv6 Internet Connection	. 18
Chap	oter 5. TP-Link Cloud Service	22
5. 1.	Register a TP-Link ID	. 23
5. 2.	Change Your TP-Link ID Information	
5. 3.	Manage the User TP-Link IDs	
	5. 3. 1.Add TP-Link ID to Manage the Router	
	5. 3. 2.Remove TP-Link ID(s) from Managing the Router	
5. 4.	Manage the Router via the TP-Link Tether App	. 26
Chap	oter 6. Network Map	27
Chap	oter 7. Wireless Settings	31
7. 1.	Specify Wireless Settings	. 32
7. 2.	Schedule Your Wireless Function	

7. 3.	Use WPS for Wireless Connection	35
	7. 3. 1.Connect via the Client's PIN	35
	7. 3. 2.Connect via the Router's PIN	36
	7. 3. 3. Push the WPS Button.	36
7. 4.	Advanced Wireless Settings	36
Chap	oter 8. Guest Network	39
8. 1.	Create a Network for Guests	40
8. 2.	Set Up Portal Authentication for the Guest Network	41
8. 3.	Limit the Bandwidth of the Guest Network	
8. 4.	Specify the Effective Time of the Guest Network	43
8. 5.	Customize Guest Network Options	44
Chap	oter 9. USB Settings	46
9. 1.	Access the USB Storage Device	47
	9. 1. 1.Access the USB Device Locally	47
	9. 1. 2.Access the USB Device Remotely	
	9. 1. 3.Customize the Access Settings	50
9. 2.	Media Sharing	
9. 3.	Time Machine	53
Chap	oter 10.HomeShield	55
10. 1.	Network Security	56
10. 2.	Parental Controls	56
10.3.	Network Analysis & Optimization	57
Chap	oter 11.OneMesh with Seamless Roaming	59
11. 1.	Set Up a OneMesh Network	60
11. 2.	Manage Devices in the OneMesh Network	62
Chap	oter 12.Network Security	64
12. 1.	Protect the Network from Cyber Attacks	65
	Access Control	
	IP & MAC Binding	
	ALG	
Chap	oter 13.NAT Forwarding	70
13. 1.	Share Local Resources on the Internet by Port Forwarding	71
13. 2.	Open Ports Dynamically by Port Triggering	73

13. 3. 13. 4.	Make Applications Free from Port Restriction by DMZ	
Chap	ter 14.VPN Server&Client	77
	Use OpenVPN to Access Your Home Network	
	Use PPTP VPN to Access Your Home Network	
	Use L2TP/IPSec VPN to Access Your Home Network	
14. 4.	Use VPN Client to Access a Remote VPN Server	91
Chap	ter 15.Customize Your Network Settings	96
15. 1.	Change the LAN Settings	97
15. 2.	Set Up Link Aggregation	97
15. 3.	Configure to Support IPTV Service	98
15. 4.	Specify DHCP Server Settings	99
15. 5.	Set Up a Dynamic DNS Service Account	100
15. 6.	Create Static Routes	102
Chap	ter 16.Manage the Router	105
16. 1.	Update the Firmware	106
	16. 1. 1.Auto Update	106
	16. 1. 2.Online Update	106
	16. 1. 3.Local Update	107
16. 2.	Backup and Restore Configuration Settings	
16. 3.	Change the Login Password	
16. 4.	Password Recovery	110
16. 5.	Local Management	
16. 6.	Local Management	111
	Remote Management	112
16.7.	Remote Management	112 114
16. 7. 16. 8.	Remote Management	112 114 116
16. 7.16. 8.16. 9.	Remote Management System Log Test the Network Connectivity	112 114 116 118
16. 7. 16. 8. 16. 9. 16. 10	Remote Management System Log Test the Network Connectivity Set System Time and Language	112 114 116 118

About This Guide

This guide is a complement of Quick Installation Guide. The Quick Installation Guide instructs you on quick internet setup, and this guide provides details of each function and shows you the way to configure these functions appropriate to your needs.

Note: Features available in the router may vary by model and software version. Router availability may also vary by region or ISP. All images, steps, and descriptions in this guide are only examples and may not reflect your actual Router experience.

Conventions

In this guide the following conventions are used:

Convention	Description
Underlined	Underlined words or phrases are hyperlinks. You can click to redirect to a website or a specific section.
Teal	Contents to be emphasized and texts on the web page are in teal, including the menus, items, buttons, etc.
>	The menu structures to show the path to load the corresponding page. For example, Advanced > Wireless > WDS means the WDS function page is under the Wireless menu that is located in the Advanced tab.
Note:	Ignoring this type of note might result in a malfunction or damage to the device.
Ø Tips:	Indicates important information that helps you make better use of your device.
symbols on the web page	 ☑ Click to edit the corresponding entry. ☑ Click to delete the corresponding entry. ☑ click to enable or disable the corresponding entry. ② Click to view more information about items on the page.

More Info

The latest software, management app and utility can be found at Download Center at https://www.tp-link.com/support/download/.

The Quick Installation Guide can be found where you find this guide or inside the package of the router.

Specifications can be found on the product page at https://www.tp-link.com.

TP-Link Community is provided for you to discuss our products and share knowledge at https://community.tp-link.com.

Our Technical Support contact information can be found at the Contact Technical Support page at https://www.tp-link.com/support/.

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) client limitations, including rated performance, location, connection, quality, and client condition.

*Use of Wi-Fi 6 (802.11ax), and features including OFDMA, MU-MIMO, 1024-QAM, and HT160 require clients to also support the corresponding features.

*Saving clients' battery power requires clients to also support the 802.11ax Wi-Fi standard. Actual power reduction may vary as a result of network conditions, client limitations, and environmental factors.

*Use of WPA3 requires clients to also support the corresponding feature.

*This router may not support all the mandatory features as ratified in Draft 3.0 of IEEE 802.11ax specification.

*Further software upgrades for feature availability may be required.

Get to Know About Your Router

This chapter introduces what the router can do and shows its appearance. It chapter contains the following sections:

- Product Overview
- Appearance

1. 1. Product Overview

TP-Link AX router, with next-generation 802.11ax Wi-Fi Technology, achieves Wi-Fi performance at its ultimate level. The revolutionary combination of OFDMA and 1024QAM improve throughput by 4 times and dramatically increase the whole network capacity and efficiency. It's also backwards compatible with 802.11a/b/g/n/ac.

Moreover, it is simple and convenient to set up and use the TP-Link router due to its intuitive web interface and the powerful Tether app.

1. 2. Appearance

1. 2. 1. Top Panel

The router's LEDs (view from left to right) are located on the front. You can check the router's working status by following the LED Explanation table.

LED Explanation

Name	Status	Indication
	On	The system has started up successfully.
(Power)	Flashing	The system is starting up or the firmware is being upgraded. Do not disconnect or power off your router.
	Off	Power is off.
<u> </u>	On	The 2.4 GHz wireless band is enabled.
(2.4 GHz Wireless)	Off	The 2.4 GHz wireless band is disabled.

Name	Status	Indication
<u></u>	On	The 5 GHz wireless band is enabled.
(5 GHz Wireless)	Off	The 5 GHz wireless band is disabled.
	Green On	Internet service is available.
(Internet)	Orange On	The router's Internet port is connected, but the internet service is not available.
	Off	The router's Internet port is unplugged.
ū	On	At least one powered-on device is connected to the router's Ethernet port.
(Ethernet)	Off	No powered-on device is connected to the router's Ethernet port.
_	On	The inserted USB device is ready to use.
(USB)	Blinking	A USB device is being identified.
(036)	Off	No device is plugged into the USB port.
45	On/Off	This light remains on for 5 minutes when a WPS connection is established, then turns off.
(WPS)	Blinking	WPS connection is in progress. This may take up to 2 minutes.

1. 2. 2. Back Panel

The following parts (view from left to right) are located on the back panel.

Button and Port Explanation

Item	Description
LED Button	Press the LED button for 1 second to turn on or off the LEDs of your router.

Item	Description
WPS Button	Press this WPS button, and immediately press the WPS button on your client device to start the WPS process. The 1 LED of the router should change from blinking to solid on, indicating successful WPS connection.
Wi-Fi Button	Press and hold the Wi-Fi button for more than 2 seconds to turn on or off the wireless function of your router.
Reset Button	Press and hold the button until the Power LED blinks to reset the router to its factory default settings.
LAN Port (1-4)	For connecting your PC or other wired devices to the router.
WAN Port	For connecting to a modem or an Ethernet outlet.
Power On/Off Button	Press this button to power on or off the router.
Power Port	For connecting the router to a power socket via the provided power adapter.

1. 2. 3. Side Panel

The following part is located on the side panel.

Button and Port Explanation

Item	Description
USB 3.0 Port	For connecting a USB storage device to the router.

Connect the Hardware

This chapter contains the following sections:


- Position Your Router
- Connect Your Router

Chapter 2 Connect the Hardware

2. 1. Position Your Router

 The product should not be located in a place where it will be exposed to moisture or excessive heat.

- Place the router in a location where it can be connected to multiple devices as well as to a power source.
- Make sure the cables and power cord are safely placed out of the way so they do not create a tripping hazard.
- The router can be placed on a shelf or desktop.
- Keep the router away from devices with strong electromagnetic interference, such as Bluetooth devices, cordless phones and microwaves.
- Generally, the router is placed on a horizontal surface, such as on a shelf or desktop. The device also can be mounted on the wall as shown in the following figure.

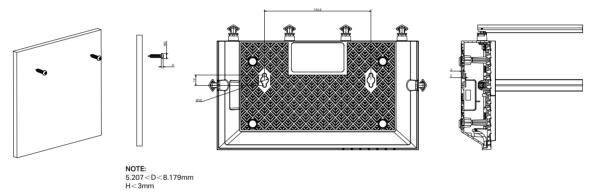

Note:

The diameter of the screw head, 5.207mm<D<8.179mm, and the distance of two screws is 143.9mm. The screw that project from the wall need around 5mm based, and the length of the screw need to be at least 20mm to withstand the weight of the product.


2. 2. Connect Your Router

Before you start:

- 1) Turn off your modem, if any, and remove the backup battery if it has one.
- 2) Place the router horizontally and orient the antennas vertically.

If your internet comes from an Ethernet outlet instead of a DSL / Cable / Satellite modem, connect the router's WAN port to it, then follow steps 3 and 4 to complete the hardware connection.

Chapter 2 Connect the Hardware

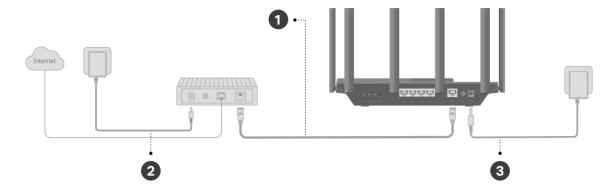


- 1. Connect the **powered-off modem** to the router's **WAN port** with an Ethernet cable.
- 2. Turn on the modem, and then wait about 2 minutes for it to restart.
- 3. Connect the power adapter to the router and turn on the router.
- 4. Verify that the hardware connection is correct by checking the following LEDs.





- 5. Connect your computer to the router.
- Method 1: Wired

Turn off the Wi-Fi on your computer and connect the devices as shown below.



- Method 2: Wirelessly
 - 1) Find the SSID (Network Name) and Wireless Password printed on the label at the bottom of the router.
 - 2) Click the network icon of your computer or go to Wi-Fi Settings of your smart device, and then select the SSID to join the network.





Chapter 2 Connect the Hardware

· Method 3: Use the WPS button

Wireless devices that support WPS, including Android phones, tablets, and most USB network cards, can be connected to your router through this method.

Note:

- WPS is not supported by iOS devices.
- The WPS function cannot be configured if the wireless function of the router is disabled. Also, the WPS function will be disabled if your wireless encryption is WEP. Please make sure the wireless function is enabled and is configured with the appropriate encryption before configuring the WPS.
 - 1) Tap the WPS icon on the device's screen. Here we take an Android phone for instance.
 - 2) Within two minutes, press the WPS button on your router.





Log In to Your Router

With a web-based utility, it is easy to configure and manage the router. The web-based utility can be used on any Windows, Mac OS or UNIX OS with a Web browser, such as Microsoft Internet Explorer, Mozilla Firefox or Apple Safari.

Follow the steps below to log in to your router.

- 1. Set up the TCP/IP Protocol in Obtain an IP address automatically mode on your computer.
- 2. Visit http://tplinkwifi.net, and create a login password for secure management purposes. Then click Let's Get Started to log in.

Set Up Internet Connection

This chapter introduces how to connect your router to the internet. The router is equipped with a web-based Quick Setup wizard. It has necessary ISP information built in, automates many of the steps and verifies that those steps have been successfully completed. Furthermore, you can also set up an IPv6 connection if your ISP provides IPv6 service.

It contains the following sections:

- Use Quick Setup Wizard
- Quick Setup Via TP-Link Tether App
- Manually Set Up Your Internet Connection
- Set Up the Router as an Access Point
- Set Up an IPv6 Internet Connection

4. 1. Use Quick Setup Wizard

The Quick Setup Wizard will guide you to set up your router.

Tips:

If you need the IPv6 internet connection, please refer to the section of Set Up an IPv6 Internet Connection.

Follow the steps below to set up your router.

- 1. Visit http://tplinkwifi.net, and log in with the password you set for the router.
- 2. Follow the step-by-step instructions to complete Quick Setup configuration or go to Advanced > Quick Setup for configuration to connect your router to the internet. Then follow the step-by-step instructions to connect your router to the internet.
- 3. To enjoy a more complete service from TP-Link (remote management, TP-Link DDNS, and more.), log in with your TP-Link ID or click Sign Up Now to get one. Then follow the instructions to bind the cloud router to your TP-Link ID.



Note:

- To learn more about the TP-Link Cloud service, please refer to the TP-Link Cloud Service section.
- If you do not want to register a TP-Link ID now, you may click Skip to proceed.
- If you have changed the preset wireless network name (SSID) and wireless password during the Quick Setup process, all your wireless devices must use the new SSID and password to connect to the router.

4. 2. Quick Setup Via TP-Link Tether App

The Tether app runs on iOS and Android devices, such as smartphones and tablets.

1. Launch the Apple App Store or Google Play store and search "TP-Link Tether" or simply scan the QR code to download and install the app.



OR







2. Launch the Tether app and log in with your TP-Link ID.

Note: If you don't have a TP-Link ID, create one first.

- 3. Tap the + button and select Wireless Router > Standard Router. Follow the steps to complete the setup and connect to the internet.
- 4. Connect your devices to the newly configured wireless networks of the router and enjoy the internet!

4. 3. Manually Set Up Your Internet Connection

In this part, you can check your current internet connection settings. You can also modify the settings according to the service information provided by your ISP.

Follow the steps below to check or modify your internet connection settings.

3. Select your internet connection type from the drop-down list.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Internet.

-	 •	

- 4. Follow the instructions on the page to continue the configuration. Parameters on the figures are just used for demonstration.
 - 1) If you choose Dynamic IP, you need to select whether to clone the MAC address. Dynamic IP users are usually equipped with a cable TV or fiber cable.

21	If you choose Static IP, enter the information provided by your ISP	in the
2,	corresponding fields.	iii tiic
3)	If you choose PPPoE, enter the username and password provided by your PPPoE users usually have DSL cable modems.	our ISP.

4)	If you choose L2TP, enter the username and password and choosecondary Connection provided by your ISP. Different parameters are reaccording to the Secondary Connection you have chosen.	
5)	If you choose PPTP, enter the username and password, and choo Secondary Connection provided by your ISP. Different parameters are raccording to the Secondary Connection you have chosen.	

5. Click SAVE.


∅ Tips

- If you use Dynamic IP and PPPoE and you are provided with any other parameters that are not required on the page, please go to Advanced > Network > Internet to complete the configuration.
- If you still cannot access the internet, refer to the $\underline{\sf FAQ}$ section for further instructions.

4. 4. Set Up the Router as an Access Point

The router can work as an access point, transforming your existing wired network to a wireless one.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > Operation Mode, select Access Point and click SAVE. The router will reboot and switch to Access Point mode.



- 3. After rebooting, connect the router to your existing wired router via an Ethernet cable.
- 4. Log in again to the web management page http://tplinkwifi.net, and go to Advanced > Quick Setup.
- 5. Configure your wireless settings and click Next.
- 6. Confirm the information and click SAVE. Now, you can enjoy Wi-Fi.
- ∅ Tips
- $\bullet \ \ \text{Functions, such as Parental Controls, QoS and NAT Forwarding, are not supported in the Access Point mode.}$
- Functions, such as Guest Network, are the same as those in the Router mode.

4. 5. Set Up an IPv6 Internet Connection

Your ISP provides information about one of the following IPv6 internet connection types: PPPoE, Dynamic IP(SLAAC/DHCPv6), Static IP, 6to4 tunnel, Pass-Through (Bridge).

 Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.

- 2. Go to Advanced > IPv6.
- 3. Enable IPv6 and select the internet connection type provided by your ISP.
- Tips

If you do not know what your internet connection type is, contact your ISP or judge according to the already known information provided by your ISP.

- 4. Fill in information as required by different connection types.
 - 1) Static IP: Fill in blanks and click SAVE.

2) Dynamic IP(SLAAC/DHCPv6): Click Advanced to input further information if your ISP requires. Click SAVE and then click Renew.

3) PPPoE: By default, the router uses the IPv4 account to connect to the IPv6 server. Click Advanced to input further information if your ISP requires. Click SAVE and then click Connect.

our ISP pro	ne IPv6 connec						
	Funnel: An						
conne	Funnel: An ction type (I urther inforr	Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance
conne	ction type (Manually Se	et Up Your I	nternet Co	nnection). Click Ac	dvance

5) Pass-Through (Bridge): Click SAVE and skip to Step 6.

_	jure LAN poi Fill in <mark>Addre</mark>			ose from the	first t

Visit the <u>FAQ</u> section if there is no internet connection.

TP-Link Cloud Service

TP-Link Cloud service provides a better way to manage your cloud devices. Log in to your router with a TP-Link ID, and you can easily monitor and manage your home network when you are out and about via the Tether app. To ensure that your router stays new and gets better over time, the TP-Link Cloud will notify you when an important firmware upgrade is available. Surely you can also manage multiple TP-Link Cloud devices with a single TP-Link ID.

This chapter introduces how to register a new TP-Link ID, bind or unbind TP-Link IDs to manage your router, and the Tether app with which you can manage your home network no matter where you may find yourself.

It contains the following sections:


- Register a TP-Link ID
- Change Your TP-Link ID Information
- Manage the User TP-Link IDs
- Manage the Router via the TP-Link Tether App

Chapter 5 TP-Link Cloud Service

5. 1. Register a TP-Link ID

If you have skipped the registration during the Quick Setup process, you can:

- 1. Visit http://tplinkwifi.net, and log in with the password you set for the router.
- 2. Go to Advanced > TP-Link ID or click TP-Link ID on the very top of the page.
- 3. Click Sign Up and follow the instructions to register a TP-Link ID.

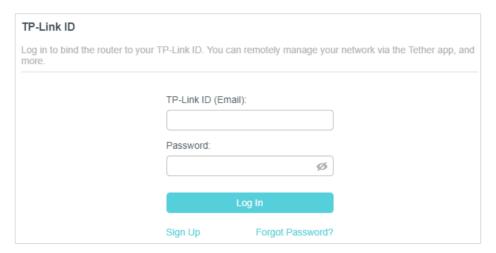

4. After activating your TP-Link ID, come back to the TP-Link ID page to log in. The TP-Link ID used to log in to the router for the first time will be automatically bound as an Admin.

Note:

- To learn more about the Admin and User TP-Link ID, refer to Manage the User TP-Link IDs.
- Once you have registered a TP-Link ID on the web management page, you can only register another TP-Link ID via the Tether APP. Please refer to Manage the Router via the TP-Link Tether App to install the app.
- If you want to unbind the admin TP-Link ID from your router, please go to Advanced > TP-Link ID, an click Unbind in the
 Device Information section.

5. 2. Change Your TP-Link ID Information


Follow the steps below to change your email address and password of your TP-Link ID as needed.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID.
- 2. Go to Advanced > TP-Link ID, and focus on the Account Information section.
- To change your email address:
- 1. Click behind the Email.
- 2. Enter the password of your TP-Link ID, then a new email address. And click SAVE.



• To change your password:

- 1. Click behind the Password.
- 2. Enter the current password, then a new password twice. And click SAVE.



5. 3. Manage the User TP-Link IDs

The TP-Link ID used to log in to the router for the first time will be automatically bound as the Admin account. An admin account can add or remove other TP-Link IDs to or

from the same router as Users. All accounts can monitor and manage the router locally or remotely, but user accounts cannot:

- Reset the router to its factory default settings either on the web management page or in the Tether app.
- Add/remove other TP-Link IDs to/from the router.

5. 3. 1. Add TP-Link ID to Manage the Router


- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID.
- 2. Go to Advanced > TP-Link ID, and focus on the Bound Accounts section.
- 3. Click Bind, enter another TP-Link ID as needed and click SAVE.

Note: If you need another TP-Link ID, please register a new one via the Tether app. Refer to Manage the Router via the
TP-Link Tether App to install the app and register a new TP-Link ID.

4. ¯	The new	TP-l	_ink ID) will b	e disp	layed	in the	Bound	Accounts	s tab	le as a	Us	er.
------	---------	------	---------	----------	--------	-------	--------	-------	----------	-------	---------	----	-----

5. 3. 2. Remove TP-Link ID(s) from Managing the Router

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID.
- 2. Go to Advanced > TP-Link ID, and focus on the Bound Accounts section.
- 3. Tick the checkbox(es) of the TP-Link ID(s) you want to remove and click Unbind.

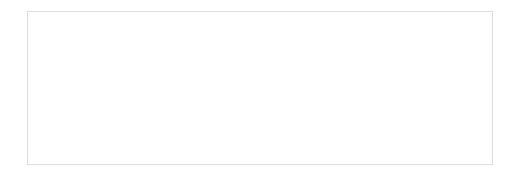

5. 4. Manage the Router via the TP-Link Tether App

The Tether app runs on iOS and Android devices, such as smartphones and tablets.

1. Launch the Apple App Store or Google Play store and search "TP-Link Tether" or simply scan the QR code to download and install the app.



٦D








- 2. Launch the Tether app and log in with your TP-Link ID.
- Note: If you don't have a TP-Link ID, create one first.
- 3. Connect your device to the router's wireless network.
- 4. Go back to the Tether app, select the model of your router and log in with the password you set for the router.
- 5. Manage your router as needed.
- Note: If you need to remotely access your router from your smart devices, you need to:
- Log in with your TP-Link ID. If you don't have one, refer to Register a TP-Link ID.
- Make sure your smartphone or tablet can access the internet with cellular data or a Wi-Fi network.

Network Map

Chapter 6 Network Map

Network Map outlines device connectivity of your network visually and helps you manage general settings of the network.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Network Map.
- 3. Click each network device icon to check and manage general network settings.
- Click Internet to check internet status.

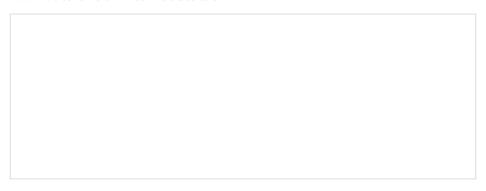

• Click the router to check device status and network settings. You can turn on or off the wireless network or guest network, or click Edit to change related settings.

Click	Mesh Devices to view the devices that form a mesh network with the rou	iter.

Network Map

Chapter 6 Network Map

	Clients to view the client devices in your network. You can block devices so access your network, or set Speed Limit to limit their upload and downs.	-
1. Click	the speeds of a device: in the Speed Limit column. Speed Limit.	
	ne download and upload speed limit according to your needs. SAVE. The speeds of the device will be limited.	

Wireless Settings

This chapter guides you on how to configure the wireless settings.

It contains the following sections:

- Specify Wireless Settings
- Schedule Your Wireless Function
- Use WPS for Wireless Connection
- Advanced Wireless Settings

Chapter 7 Wireless Settings

7. 1. Specify Wireless Settings

2. Go to Wireless or Advanced > Wireless > Wireless Settings.

The router's wireless network name (SSID) and password, and security option are preset in the factory. The preset SSID and password can be found on the label of the router. You can customize the wireless settings according to your needs.

1. Visit http://tplinkwifi.net ,	and log in with your	TP-Link ID or t	he password yoι	ı set for
the router.				

To enable or disable TWT:

TWT (Target Wake Time) allows 802.11ax routers and clients to negotiate their periods to transmit and receive data packets. Clients only wake up at TWT sessions and remain in sleep mode for the rest of the time, which significantly extend their battery life. It is disabled by default.

- 1. Go to Advanced > Wireless > Wireless Settings.
- 2. Enable TWT.

To enable or disable OFDMA/MU-MIMO:

OFDMA enables multiple users to transmit data simultaneously, and thus greatly improves speed and efficiency. Noted that only when your clients also support OFDMA, can you fully enjoy the benefits. It is disabled by default.

The MU-MIMO (Multi-User Multiple-Input Multiple-Output) feature enables the router to simultaneously send data to multiple devices, significantly enhancing the network efficiency.

- Go to Advanced > Wireless > Wireless Settings.
- 2. Enable OFDMA only or enable OFDMA and MU-MIMO.

To use the Smart Connect function:

The Smart Connect function lets you enjoy a more high-speed network by assigning your devices to best wireless bands based on actual conditions to balance network demands.

- 1. Go to Advanced > Wireless > Wireless Settings.
- 2. Enable Smart Connect.

- 3. Keep the default values or set a new SSID and password, and click SAVE. This SSID and password will be applied for the 2.4GHz and 5GHz wireless networks. If you want to configure the wireless settings separately for each band, untick the checkbox to disable this feature.
- To enable or disable the wireless function:
- 1. Go to Wireless or Advanced > Wireless > Wireless Settings.
- 2. The wireless function is enabled by default. If you want to disable the wireless function of the router, just untick the Enable checkbox of each wireless network. In this case, all the wireless settings will be invalid.
- To change the wireless network name (SSID) and wireless password:
- Go to Wireless or Advanced > Wireless > Wireless Settings.
- 2. Create a new SSID in Network Name (SSID) and customize the password for the network in Password. The value is case-sensitive.
- Note: If you change the wireless settings with a wireless device, you will be disconnected when the settings are effective. Please write down the new SSID and password for future use.
- To hide SSID:
- 1. Go to Wireless or Advanced > Wireless > Wireless Settings.
- 2. Select Hide SSID, and your SSID won't display when you scan for local wireless networks on your wireless device and you need to manually join the network.
- To change the security option:
- 1. Go to Advanced > Wireless > Wireless Settings.

2. Select an option from the Security drop-down list: None, WPA/WPA2-Personal, WPA2/WPA3-Personal, WPA/WPA2-Enterprise. We recommend you don't change the default settings unless necessary.

- To change the transmit power and channel settings:
- 1. Go to Advanced > Wireless > Wireless Settings.
- 2. Select an option from the Transmit Power drop-down list: High, Middle or Low. It is recommended to keep the default settings.
- 3. Change channel settings if needed.
 - 2.4GHz Channel Width Select a channel width (bandwidth) for the 2.4 GHz network.
 - 2.4GHz Channel Select an operating channel for the 2.4 GHz network. It is recommended to keep the default channel if you are not experiencing the intermittent wireless connection issue.
 - 5GHz Channel Width Select a channel width (bandwidth) for the 5 GHz network.
 - 5GHz Channel Select an operating channel for the 5 GHz network. It is recommended to keep the default channel if you are not experiencing the intermittent wireless connection issue.
- 4. If Smart Connect is disabled, you can also change the following settings:
 - Mode Select a transmission mode according to your wireless client devices. It is recommended to just leave it as default.

7. 2. Schedule Your Wireless Function

The wireless network can be automatically off at a specific time when you do not need the wireless connection.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Wireless > Wireless Schedule.

3. Enable the Wireless Schedule feature.

 Click Add to specify a wireless off period during which you need the wireless off automatically, and click SAVE.

Note:

- The Effective Time Schedule is based on the time of the router. You can go to Advanced > System > Time & Language to modify the time.
- The wireless network will be automatically turned on after the time period you set.

7. 3. Use WPS for Wireless Connection

Wi-Fi Protected Setup (WPS) provides an easier approach to set up a security-protected Wi-Fi connection.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Make sure the Wi-Fi of your router is on and go to Advanced > Wireless > WPS.

7. 3. 1. Connect via the Client's PIN

Enter the PIN of your device and click Connect. Then your device will get connected to the router.


Connect via the Router's PIN 7. 3. 2. Select Router's PIN in Method 1 to enable Router's PIN. You can use the default PIN or generate a new one. Note: PIN (Personal Identification Number) is an eight-character identification number preset to each router. WPS supported devices can connect to your router with the PIN. The default PIN is printed on the label of the router. 7.3.3. **Push the WPS Button** Click Start on the screen or directly press the router's WPS button. Within two minutes, enable WPS on your personal device. Success will appear on the screen and the WPS LED of the router should change from flashing to solid on, indicating successful WPS connection.

7. 4. Advanced Wireless Settings

Check advanced wireless settings for your device.

 Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.

- 2. Go to Advanced > Wireless > Additional Settings.
- 3. Configure advanced wireless settings.

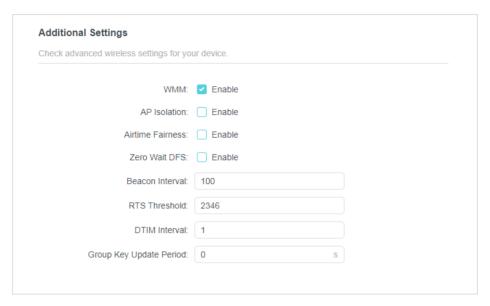

- WMM WMM function can guarantee the packets with high-priority messages being transmitted preferentially.
- AP Isolation This function isolates all connected wireless stations so that wireless stations cannot access each other through WLAN.
- Airtime Fairness This function can improve the overall network performance by sacrificing a little bit of network time on your slow devices.
- Zero Wait DFS Zero Wait DFS (Dynamic Frequency Selection) allows the router to immediately reselect a new channel once the radar signal is detected on a channel allocated to radar devices to ensure lag-free network experience.
- Beacon Interval Enter a value between 40 and 1000 in milliseconds to determine the duration between beacon packets that are broadcasted by the router to synchronize the wireless network. The default value is 100 milliseconds.
- RTS Threshold- Enter a value between 1 and 2346 to determine the packet size of data transmission through the router. By default, the RTS (Request to Send) Threshold size is 2346. If the packet size is greater than the preset threshold, the router will send RTS frames to a particular receiving station and negotiate the sending of a data frame.
- DTIM Interval The value determines the interval of DTIM (Delivery Traffic Indication Message). Enter a value between 1 and 15 intervals. The default value is 1, which indicates the DTIM Interval is the same as Beacon Interval.

• Group Key Update Period - Enter a number of seconds (minimum 30) to control the time interval for the encryption key automatic renewal. The default value is 0, meaning no key renewal.

Chapter 8

Guest Network

This function allows you to provide Wi-Fi access for guests without disclosing your main network. When you have guests in your house, apartment, or workplace, you can create a guest network for them. In addition, you can customize the guest network according to your needs.

It contains the following sections:

- Create a Network for Guests
- Set Up Portal Authentication for the Guest Network
- Limit the Bandwidth of the Guest Network
- Specify the Effective Time of the Guest Network
- Customize Guest Network Options

8. 1. Create a Network for Guests

1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.

- 2. Go to Wireless and locate the Guest Network section.
- 3. Create a guest network as needed.
 - 1) Enable 2.4GHz and/or 5GHz.
 - 2) Customize the SSID. Don't select Hide SSID unless you want your guests to manually input the SSID for guest network access.

3)	Select the Security type and customize your own password. If No security type and customize your own password.	curity is
	selected, no password is needed to access your guest network.	

- 4. Click SAVE. Now your guests can access your guest network using the SSID and password you set!
- 5. You can also click Share Network to share the SSID and password to your guests.

∅ Tips:

To view guest network information, go to Network Map and locate the Guest Network section. You can turn on or off the guest network function conveniently.

8. 2. Set Up Portal Authentication for the Guest Network

Imagine that you run a small shop and provide a guest network for your customers. You want to seize every opportunity to promote your shop, which makes portal authentication an excellent choice. Customers will be directed to a web page for access verification, on which your personalized promotion is displayed. Moreover, you can specify a web link so that newly connected guests will be redirected to, for example, the official website of your shop.

1.	Visit http://tplinkwifi.net ,	and	log in	with	your	TP-Link II	D or	the	passwo	rd you	set for
	the router.										

2. 0	o to) Wirele	ess and I	locate the	Guest	Network	section.
------	------	----------	-----------	------------	-------	---------	----------

3. Set Se	ecurity to Portal.		

- 4. Select the Authentication Type.
- If you select No Authentication, guests can access the network without any authentication.
- If you select Simple Password, specify a password for authentication.
- 5. Specify the Authentication Timeout. When a guest's authentication expires, they have to reconnect to the network. The default value Always indicates that authentication will never time out.

6. (Optional) Enable Redirect and enter your desired web link. Newly conne	cted guests
will be redirected to the website you specify.	


7. (Optional) Click to edit the Login Page. You can customize the appearance and

ontent of the	; logili page	7.		

8. Click SAVE.

8. 3. Limit the Bandwidth of the Guest Network

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Wireless > Guest Network.
- 3. Enable Bandwidth Control for one or all networks as you need.



 $\label{eq:continuous} \textbf{4. Limit the download} \ and \ upload \ bandwidth \ for \ the \ network.$

5. Click SAVE. Now you can limit the bandwidth of the guest network.

8. 4. Specify the Effective Time of the Guest Network

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Wireless > Guest Network.

Chapter 8

Guest Network

 Specify the Effective Time. The guest network will be automaticated the effective time. The default value No Limit indicates that the always remain on. 	
4. Click SAVE. Now you can keep the guest network on only when yo	ou need it.
8. 5. Customize Guest Network Options	
 Visit http://tplinkwifi.net, and log in with your TP-Link ID or the pathe router. 	assword you set for
2. Go to Advanced > Wireless > Guest Network. Locate the Guest Pe	ermissions section.
3. Customize guest network options according to your needs.	

Allow guests to see each other

Chapter 8

Tick this checkbox if you want to allow the wireless clients on your guest network to communicate with each other via methods such as network neighbors and Ping.

Allow guests to access your local network

Tick this checkbox if you want to allow the wireless clients on your guest network to communicate with the devices connected to your router's LAN ports or main network via methods such as network neighbors and Ping.

Guest Network

4. Click SAVE. Now you can ensure network security and privacy!

Chapter 9

USB Settings

This chapter describes how to use the USB ports to share files and media from the USB storage devices over your home network locally, or remotely through the internet.

The router supports USB external flash drives and hard drives.

It contains the following sections:

- Access the USB Storage Device
- Media Sharing
- Time Machine

9. 1. Access the USB Storage Device

Insert your USB storage device into the router's USB port and then access files stored there locally or remotely.

∅ Tips:

- If you use USB hubs, make sure no more than 4 devices are connected to the router.
- If the USB storage device requires using bundled external power, make sure the external power has been connected.
- If you use a USB hard drive, make sure its file system is FAT32, exFat, NTFS or HFS+.
- Before you physically disconnect a USB device from the router, safely remove it to avoid data damage: Go to Advanced > USB > USB Storage Device and click Remove.

9. 1. 1. Access the USB Device Locally

Insert your USB storage device into the router's USB port and then refer to the following table to access files stored on your USB storage device.

	 Method 1: Go to Computer > Network, then click the Network Server Name (*SHARE by default) in the Computer section. Note: Operations in different systems are similar. Here we take Windows 7 as an example. 	TP-
Windows computer		

Windows computer	Method 2: Open the Windows Explorer (or go to Computer) and type the server address \tplinkwifi.net or ftp://tplinkwifi.net in the address bar, then press Enter.
Мас	 Select Go > Connect to Server. Type the server address smb://tplinkwifi.net. Click Connect. When prompted, select the Guest radio box. (If you have set up a username and a password to deny anonymous access to the USB disks, you should select the Registered User radio box. To learn how to set up an account for the access, refer to To Set Up Authentication for Data Security.)
Tablet	Use a third-party app for network files management.

You can also access your USB storage device by using your Network/Media Server Name as the server address. Refer to To Customize the Address of the USB Storage Device to learn more.

9. 1. 2. Access the USB Device Remotely

You can access your USB disk outside the local area network. For example, you can:

Tips

• Share photos and other large files with your friends without logging in to (and paying for) a photo-sharing site or email system.

- Get a safe backup for the materials for a presentation.
- Remove the files on your camera's memory card from time to time during the journey.


Note:

If your ISP assigns a private WAN IP address (such as 192.168.x.x or 10.x.x.x), you cannot use this feature because private addresses are not routed on the internet.

Follow the steps below to configure remote access settings.

- Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > USB > USB Storage Device.
- 3. Tick the Internet FTP checkbox, and then click SAVE.

4. Refer to the following table to access your USB disk remotely.

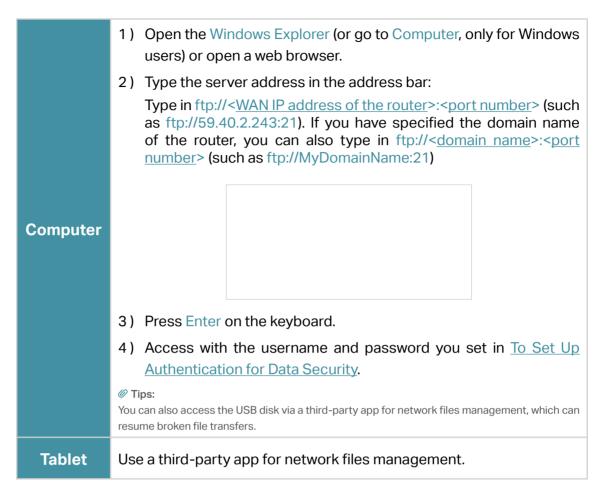

Tips:

Click Set Up a Dynamic DNS Service Account to learn how to set up a domain name for you router.

9. 1. 3. Customize the Access Settings

By default, all the network clients can access all folders on your USB disk. You can customize your sharing settings by setting a sharing account, sharing specific contents and setting a new sharing address on the router's web management page.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > USB > USB Storage Device.
- To Customize the Address of the USB Storage Device

You can customize the server name and use the name to access your USB storage device.


1. In the Access Method session, make sure Samba for Windows is ticked, and enter a Network/Media Server Name as you like, such as MyShare, then click SAVE.

Chap	er 9 USB S	Settings
	bw you can access the USB storage device by visiting \\MyShare (for Windows).	ows) or
•	Only Share Specific Content	
	on the File Sharing section. Specify sharing folders that you want to sha SAVE.	are and

• To Set Up Authentication for Data Security

You can set up authentication for your USB storage device so that network clients will be required to enter username and password when accessing the USB storage device.

1. In the File Sharing section, enable Secure Sharing.

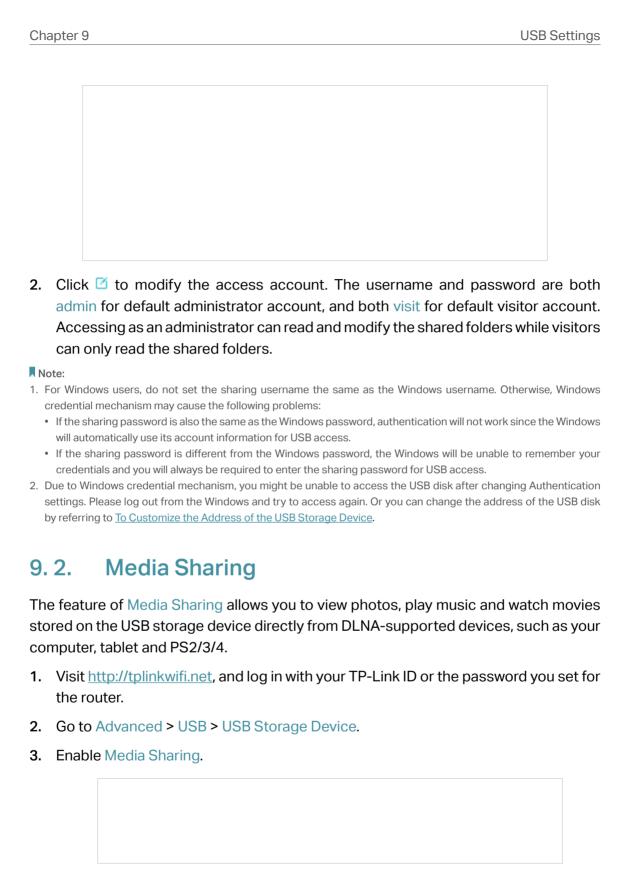

- 4. When your USB storage device is inserted into the router, your DLNA-supported devices (such as your computer and pad) connected to the router can detect and play the media files on the USB storage devices.
- **5.** Refer to the following table for detailed instructions.

	 Go to Computer > Network, then click the Media Server <u>number</u>-share by default) in the Media Devices section. Note:	Name (<u>N</u>	lodel
	Here we take Windows 7 as an example.		
Windows			
Computer			
Tablet	Use a third-party DLNA-supported player.		

9. 3. Time Machine

Time Machine backs up all files on your Mac computer to a USB storage device connected to your router.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > USB > Time Machine.

- 3. Tick the checkbox to enable Time Machine.
- 4. Click Select to select a location for Time Machine backups.
- 5. Set the Size Limit for Backups.

Note: 0 means no limit for the space.

6. Click SAVE.

Chapter 10

HomeShield

Customize your home network with enhanced security using a kit of features built in TP-Link HomeShield. Whether protecting your sensitive data or limiting the access of kids and guests, TP-Link HomeShield provides you the tools you need to fully manage your network.

It contains the following sections:

- Network Security
- Parental Controls
- Network Analysis & Optimization

Chapter 10 HomeShield

10. 1. Network Security

TP-Link HomeShield provides many tools to protect your network from malicious attacks.



Network Analysis

Analyze and optimize your network



IoT Protection

Get real-time security for your Internet of Things



Intrusion Prevention System

Identifies and block network intruders



Malicious Content Filter

Block malicious content



DDoS Protection

Protects your home network from DDoS attacks

To use this feature, download Tether to enjoy the HomeShield service

1. Scan the QR code or get the Tether app from the Apple App Store or Google Play.



OR







- 2. Launch the Tether app and log in with your TP-Link ID. If you don't have an account, create one first.
- 3. Log in to your router and tap the HomeShield tab to use this feature.

10. 2. Parental Controls

Parental Controls allows you to set up unique restrictions on internet access for each member of your family. You can block inappropriate content, set daily limits for the total time spent online and restrict internet access to certain times of the day.

Chapter 10 HomeShield



Child Protection

Keep your child away from inappropriate content



Family Incentive Program

Manage screen time and create rewards



Family Time

Pause the internet to enjoy family time

To use this feature, download Tether to enjoy the HomeShield service

1. Scan the QR code or get the Tether app from the Apple App Store or Google Play.



OR







- 2. Launch the Tether app and log in with your TP-Link ID. If you don't have an account, create one first.
- 3. Log in to your router and tap the HomeShield tab to use this feature.

10. 3. Network Analysis & Optimization

TP-Link HomeShield provides many tools for you to analyze and optimize your network.



Weekly and Monthly Reports

Get weekly and monthly reports of your network usage



Quality of Service (QoS)

Prioritizes devices to give faster performance



Scan

Run a scan for a better network performance and security anytime

- To use this feature, download Tether to enjoy the HomeShield service
- 1. Scan the QR code or get the Tether app from the Apple App Store or Google Play.



OR







Chapter 10 HomeShield

2. Launch the Tether app and log in with your TP-Link ID. If you don't have an account, create one first.

3. Log in to your router and tap the HomeShield tab to use this feature.

Chapter 11


OneMesh with Seamless Roaming

This chapter introduces the TP-Link OneMesh[™] feature.

It contains the following sections:

- Set Up a OneMesh Network
- Manage Devices in the OneMesh Network

TP-Link OneMesh & router and TP-Link OneMesh & extenders work together to form one unified Wi-Fi network. Walk through your home and stay connected with the fastest possible speeds thanks to OneMesh's seamless coverage.

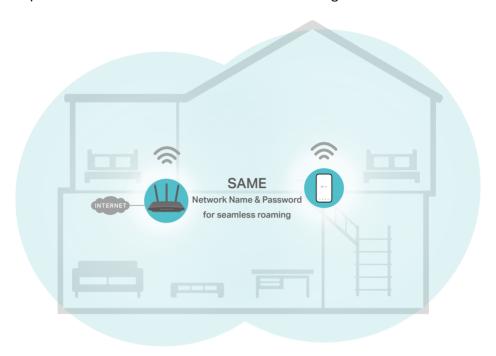

a

Unified Wi-Fi Network

Router and extenders share the same wireless settings, including network name, password, access control settings and more.



Seamless Roaming

Devices automatically switch between your router and extenders as you move through your home for the fastest possible speeds.

(0)

Easy Setup and Management

Set up a OneMesh network with a push of WPS buttons. Manage all network devices on the Tether app or at your router's web management page.

11. 1. Set Up a OneMesh Network

- Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > OneMesh.
- 3. Enable OneMesh.

	ect a OneMesh extender to this router by following the setup instruction der's manual. The extender will be listed on the router's OneMesh page.	s in the
Note:	To check full list of TP-Link OneMesh devices, visit https://www.tp-link.com/onemesh/compatibility	<i>.</i>
_	have set up the extender to join the OneMesh network, it will be listed r's OneMesh page.	on the
	rwise, you need to find it in the Available OneMesh Devices list and click to the OneMesh network.	Add to

Done! Now your router and extender successfully form a OneMesh network!

11. 2. Manage Devices in the OneMesh Network

In a OneMesh network, you can manage all mesh devices and connected clients on your router's web page.

 Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router. Go to Network Map. Click to view all mesh devices, and click to view all connected clients. 	OI
·	
3. Click to view all mesh devices, and click to view all connected clients.	
To manage a OneMesh device in the network:	
1. Visit http://tplinkwifi.net , and log in with your TP-Link ID or the password you set for the router.	or
2. Go to Advanced > OneMesh.	

3. Click the OneMesh device to view detailed information.

- 4. Manage the OneMesh device as needed. You can:
 - Change device information.
 - Click Manage Device to redirect to the web management page of this device.
 - Click Leave OneMesh to delete this device from the OneMesh network.

Chapter 12

Network Security

This chapter guides you on how to protect your home network from cyber attacks and unauthorized users by implementing these three network security functions. You can protect your home network from cyber attacks, block or allow specific client devices to access your network using Access Control, or you can prevent ARP spoofing and ARP attacks using IP & MAC Binding.

It contains the following sections:

- Protect the Network from Cyber Attacks
- Access Control
- IP & MAC Binding

^{*}For a more comprehensive home network protection system, refer to the <u>HomeShield</u> chapter.

12. 1. Protect the Network from Cyber Attacks

The SPI (Stateful Packet Inspection) Firewall protects the router from cyber attacks and validate the traffic that is passing through the router based on the protocol. This function is enabled by default.

1.	Visit http://tplinkwifi.net , and log in with your TP-Link ID or the password you set for
	the router.

2. Go to Advanced > Security > Firewall. It's recommended to keep the default settings.

12. 2. Access Control

Access Control is used to block or allow specific client devices to access your network (via wired or wireless) based on a list of blocked devices (Blacklist) or a list of allowed devices (Whitelist).

I want to:

Block or allow specific client devices to access my network (via wired or wireless).

How can I do that?

- Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Security > Access Control.
- 3. Toggle on to enable Access Control.
- **4.** Select the access mode to either block (recommended) or allow the device(s) in the list.

To block specific device(s):

1) Select Blacklist.




- 2) Click 1 Add and select devices you want to be blocked and Click ADD.
- 3) The Operation Succeeded message will appear on the screen, which means the selected devices have been successfully added to the blacklist.




To allow specific device(s):


1) Select Whitelist and click SAVE.

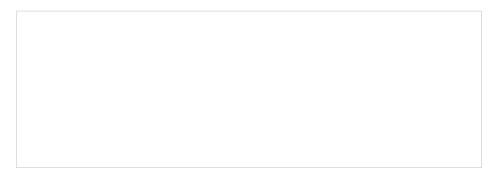


2) Your own device is in the whitelist by default and cannot be deleted. Click • Add to add other devices to the whitelist.



- · Add connected devices
- 1) Click Select From Device List.
- 2) Select the devices you want to be allowed and click ADD.



- 3) The Operation Succeeded message will appear on the screen, which means the selected devices have been successfully added to the whitelist.
- · Add unconnected devices
- 1) Click Add Manually.
- 2) Enter the Device Name and MAC Address of the device you want to be allowed and click ADD.



3) The Operation Succeeded message will appear on the screen, which means the device has been successfully added to the whitelist.

Done!

Now you can block or allow specific client devices to access your network (via wired or wireless) using the Blacklist or Whitelist.

12.3. IP & MAC Binding

IP & MAC Binding, namely, ARP (Address Resolution Protocol) Binding, is used to bind network device's IP address to its MAC address. This will prevent ARP Spoofing and other ARP attacks by denying network access to an device with matching IP address in the Binding list, but unrecognized MAC address.

ı	wa	nt	tο	
	wa			١_

Prevent ARP spoofing and ARP attacks.

How can I do that?

1.	Visit http://tplinkwifi.net , and log in with your TP-Link ID or the password you set for
	the router.

2.	Go to	Advanced >	Security >	IP & MAC	Binding.

3.	Enak	ole IP &	MAC B	Binding].			

4. Bind your device(s) according to your need.

To bind the connected device(s):

Click 👴	Add in the	Binding	List sec	tion.		

2) Click VIEW CONNECTED DEVICES and select the device you want to bind. The MAC Address and IP Address fields will be automatically filled in.

3) Click SAVE.

Chapter 12 Network Security

To	hind	the	unconn	ected	device:
10	DIIIU	uic	uncom	CCLCG	ucvicc.

1) Click	🕕 Add jn	the Bindi	ing List s	ection.		

- 2) Enter the MAC Address and IP Address that you want to bind.
- 3) Click SAVE.

Done!

Now you don't need to worry about ARP spoofing and ARP attacks!

12.4. ALG

ALG allows customized NAT traversal filters to be plugged into the gateway to support address and port translation for certain application layer "control/data" protocols such as FTP, TFTP, H323 etc. It is recommended to keep the default settings.

You may need to disable SIP ALG when you are using voice and video applications to create and accept a call through the router, since some voice and video communication applications do not work well with SIP ALG.

- Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Security > ALG.

NAT Forwarding

The router's NAT (Network Address Translation) feature makes devices on the LAN use the same public IP address to communicate with devices on the internet, which protects the local network by hiding IP addresses of the devices. However, it also brings about the problem that an external host cannot initiatively communicate with a specified device on the local network.

With the forwarding feature the router can penetrate the isolation of NAT and allows devices on the internet to initiatively communicate with devices on the local network, thus realizing some special functions.

The TP-Link router supports four forwarding rules. If two or more rules are set, the priority of implementation from high to low is Port Forwarding, Port Triggering, UPNP and DMZ.

It contains the following sections:

- Share Local Resources on the Internet by Port Forwarding
- Open Ports Dynamically by Port Triggering
- Make Applications Free from Port Restriction by DMZ
- Make Xbox Online Games Run Smoothly by UPnP

13. 1. Share Local Resources on the Internet by Port Forwarding

When you build up a server on the local network and want to share it on the internet, Port Forwarding can realize the service and provide it to internet users. At the same time Port Forwarding can keep the local network safe as other services are still invisible from the internet.

Port Forwarding can be used for setting up public services on your local network, such as HTTP, FTP, DNS, POP3/SMTP and Telnet. Different services use different service ports. Port 80 is used in HTTP service, port 21 in FTP service, port 25 in SMTP service and port 110 in POP3 service. Please verify the service port number before the configuration.

I want to:

Share my personal website I've built in local network with my friends through the internet.

For example, the personal website has been built on my home PC (192.168.0.100). I hope that my friends on the internet can visit my website in some way. The PC is connected to the router with the WAN IP address 218.18.232.154.



How can I do that?

- 1. Assign a static IP address to your PC, for example 192.168.0.100.
- 2. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 3. Go to Advanced > NAT Forwarding > Port Forwarding.
- 4. Click Add.

 Click VIEW COMMON SERVICES and select HTTP. The External and Protocol will be automatically filled in. 	rnal Port, Internal Por
6. Click VIEW CONNECTED DEVICES and select your home PC Address will be automatically filled in. Or enter the PC's IP ad manually in the Device IP Address field.	
7. Click SAVE.	

(Tine

- It is recommended to keep the default settings of Internal Port and Protocol if you are not clear about which port and protocol to use.
- If the service you want to use is not in the common services list, you can enter the corresponding parameters manually. You should verify the port number that the service needs.
- You can add multiple port forwarding rules if you want to provide several services in a router. Please note that the External Port should not be overlapped.

Done!

Users on the internet can enter http:// WAN IP (in this example: http:// 218.18.232.154) to visit your personal website.

Tips:

The WAN IP should be a public IP address. For the WAN IP is assigned dynamically by the ISP, it is recommended
to apply and register a domain name for the WAN referring to <u>Set Up a Dynamic DNS Service Account</u>. Then users
on the internet can use http:// domain name to visit the website.

• If you have changed the default External Port, you should use http:// WAN IP: External Port or http:// domain name: External Port to visit the website.

13. 2. Open Ports Dynamically by Port Triggering


Port Triggering can specify a triggering port and its corresponding external ports. When a host on the local network initiates a connection to the triggering port, all the external ports will be opened for subsequent connections. The router can record the IP address of the host. When the data from the internet return to the external ports, the router can forward them to the corresponding host. Port Triggering is mainly applied to online games, VoIPs, video players and common applications including MSN Gaming Zone, Dialpad and Quick Time 4 players, etc.

Follow the steps below to configure the Port Triggering rules:

1.	Visit http://tplinkwifi.net ,	and log in with	າ your TP-l	Link ID or	the password	you set for
	the router.					



3. Click VIEW COMMON SERVICES, and select the desired application. The Triggering Port, Triggering Protocol and External Port will be automatically filled in. The following picture takes application MSN Gaming Zone as an example.



4. Click SAVE.

@ Tips:

- You can add multiple port triggering rules according to your network need.
- The triggering ports can not be overlapped.
- If the application you need is not listed in the Existing Applications list, please enter the parameters manually. You should verify the external ports the application uses first and enter them into External Port field according to the format the page displays.

13. 3. Make Applications Free from Port Restriction by DMZ

When a PC is set to be a DMZ (Demilitarized Zone) host on the local network, it is totally exposed to the internet, which can realize the unlimited bidirectional communication between internal hosts and external hosts. The DMZ host becomes a virtual server with all ports opened. When you are not clear about which ports to open in some special applications, such as IP camera and database software, you can set the PC to be a DMZ host.

Note:

When DMZ is enabled, the DMZ host is totally exposed to the internet, which may bring some potential safety hazards. If DMZ is not in use, please disable it in time.

I want to:

Make the home PC join the internet online game without port restriction.

For example, due to some port restriction, when playing the online games, you can log in normally but cannot join a team with other players. To solve this problem, set your PC as a DMZ host with all ports open.

How can I do that?

- 1. Assign a static IP address to your PC, for example 192.168.0.100.
- 2. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 3. Go to Advanced > NAT Forwarding > DMZ and tick to enable DMZ.

4.	Click	VIEW	CONNECTED	DEVICES	and	select	your	PC.	The	Device	ΙP
	Addre	ss will l	be automatically	y filled in. C	r ente	er the PO	C's IP a	addres	ss 19:	2.168.0.1	00
	manua	ally in th	ne DMZ Host IP	Address fie	ld.						

5. Click SAVE.

Done!

The configuration is completed. You've set your PC to a DMZ host and now you can make a team to game with other players.

13. 4. Make Xbox Online Games Run Smoothly by UPnP

The UPnP (Universal Plug and Play) protocol allows applications or host devices to automatically find the front-end NAT device and send request to it to open the corresponding ports. With UPnP enabled, the applications or host devices on the local network and the internet can freely communicate with each other thus realizing the seamless connection of the network. You may need to enable the UPnP if you want to use applications for multiplayer gaming, peer-to-peer connections, real-time communication (such as VoIP or telephone conference) or remote assistance, etc.

Tips:

- UPnP is enabled by default in this router.
- Only the application supporting UPnP protocol can use this feature.
- UPnP feature needs the support of operating system (e.g. Windows Vista/ Windows 7/ Windows 8, etc. Some of operating system need to install the UPnP components).

For example, when you connect your Xbox to the router which has connected to the internet to play online games, UPnP will send request to the router to open the

corresponding ports allowing the following data penetrating the NAT to transmit. Therefore, you can play Xbox online games without a hitch.



If necessary, you can follow the steps to change the status of UPnP.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > NAT Forwarding > UPnP and toggle on or off according to your needs.

VPN Server&Client

The router offers several ways to set up VPN connections:

VPN Server allows remote devices to access your home network in a secured way through the internet. The router supports three types of VPN Server:

OpenVPN is somewhat complex but with higher security and more stability, suitable for restricted environments such as campus network and company intranet.

PPTP VPN is easy to use with the built-in VPN software of computers and mobile devices, but it is vulnerable and may be blocked by some ISPs.

L2TP/IPSec VPN is more secure but slower than PPTP VPN, and may have trouble getting around firewalls.

VPN Client allows devices in your home network to access remote VPN servers, without the need to install VPN software on each device.


This chapter contains the following sections:

- Use OpenVPN to Access Your Home Network
- Use PPTP VPN to Access Your Home Network
- Use L2TP/IPSec VPN to Access Your Home Network
- Use VPN Client to Access a Remote VPN Server

14. 1. Use OpenVPN to Access Your Home Network

OpenVPN Server is used to create an OpenVPN connection for remote devices to access your home network.

To use the VPN feature, you need to enable OpenVPN Server on your router, and install and run VPN client software on remote devices. Please follow the steps below to set up an OpenVPN connection.



Step 1. Set up OpenVPN Server on Your Router

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.

Go to Advanced > VPN Server > OpenVPN, and tick the Enable box of OpenVPN.

Note:

- Before you enable VPN Server, we recommend you configure Dynamic DNS Service (recommended) or assign a static IP address for router's WAN port and synchronize your System Time with internet.
- The first time you configure the OpenVPN Server, you may need to generate a certificate before you enable the VPN Server.
- 3. Select the Service Type (communication protocol) for OpenVPN Server: UDP, TCP.
- 4. Enter a VPN Service Port to which a VPN device connects, and the port number should be between 1024 and 65535.
- 5. In the VPN Subnet/Netmask fields, enter the range of IP addresses that can be leased to the device by the OpenVPN server.

6. Select your Client Access type. Select Home Network Only if you only want the remote device to access your home network; select Internet and Home Network if

you also want the remote device to access internet through the VPN Server.

7. Click SAVE.

8. Click GENERATE to get a new certificate.

Note: If you have already generated one, please skip this step, or click GENERATE to update the certificate.

9. Click EXPORT to save the OpenVPN configuration file which will be used by the remote device to access your router.

Step 2. Configure OpenVPN Connection on Your Remote Device

- 1. Visit http://openvpn.net/index.php/download/community-downloads.html to download the OpenVPN software, and install it on your device where you want to run the OpenVPN client utility.
- Note: You need to install the OpenVPN client utility on each device that you plan to apply the VPN function to access your router. Mobile devices should download a third-party app from Google Play or Apple App Store.
- 2. After the installation, copy the file exported from your router to the OpenVPN client utility's "config" folder (for example, C:\Program Files\OpenVPN\config on Windows). The path depends on where the OpenVPN client utility is installed.
- 3. Run the OpenVPN client utility and connect it to OpenVPN Server.

14. 2. Use PPTP VPN to Access Your Home Network

PPTP VPN Server is used to create a PPTP VPN connection for remote devices to access your home network.

To use the VPN feature, you need to set up PPTP VPN Server on your router, and configure the PPTP connection on remote devices. Please follow the steps below to set up a PPTP VPN connection.

Step 1. Set up PPTP VPN Server on Your Router

1. Visit the ro	http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for buter.
	Advanced > VPN Server > PPTP, and tick the Enable box of PPTP.
	fore you enable VPN Server, we recommend you configure Dynamic DNS Service (recommended) or assign a ddress for router's WAN port and synchronize your System Time with internet.
	e Client IP Address field, enter the range of IP addresses (up to 10) that can be d to the devices by the PPTP VPN server.
4. Set tl	ne PPTP connection permission according to your needs.
•	Select Allow Samba (Network Place) access to allow your VPN device to access your local Samba server.
•	Select Allow NetBIOS passthrough to allow your VPN device to access your Samba server using NetBIOS name.
•	Select Allow Unencrypted connections to allow unencrypted connections to your VPN server.
5. Click	SAVE.
	igure the PPTP VPN connection account for the remote device. You can create 16 accounts.

- 1) Click Add.
- 2) Enter the Username and Password to authenticate devices to the PPTP VPN Server.

•	Click ADD.	
-	Configure PPTP VPN Connection on Your Remote Device	
	note device can use the Windows built-in PPTP software or a third-part re to connect to PPTP Server. Here we use the Windows built-in PPTP se kample.	
1. Go to	Start > Control Panel > Network and Internet > Network and Sharing Co	enter.
2. Selec	ct Set up a new connection or network.	

3. Select Connect to a workplace and click Next.

4. Selec	t Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	t Use my Internet connection (VPN).
4. Selec	t Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).
4. Selec	et Use my Internet connection (VPN).

address field. Click Next.


82

VPN Server&Client

r the User name and Password you have set for the PPTP VPN server or er, and click Connect.	n your

7. Click Connect Now when the VPN connection is ready to use.

VPN Server&Client



14. 3. Use L2TP/IPSec VPN to Access Your Home Network

L2TP/IPSec VPN Server is used to create a L2TP/IPSec VPN connection for remote devices to access your home network.

To use the VPN feature, you need to set up L2TP/IPSec VPN Server on your router, and configure the L2TP/IPSec connection on remote devices. Please follow the steps below to set up the L2TP/IPSec VPN connection.



Step 1. Set up L2TP/IPSec VPN Server on Your Router

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > VPN Server > L2TP/IPSec, and enable L2TP/IPSec.

Note:

- Firmware update may be required to support L2TP/IPSec VPN Server.
- Before you enable VPN Server, we recommend you configure Dynamic DNS Service (recommended) or assign a static IP address for router's WAN port and synchronize your System Time with internet.

Chapter 14 **VPN Server&Client** 3. In the Client IP Address field, enter the range of IP addresses (up to 10) that can be leased to the devices by the L2TP/IPSec VPN server. 4. Keep IPSec Encryption as Encrypted and create an IPSec Pre-Shared Key. 5. Click SAVE. 6. Configure the L2TP/IPSec VPN connection account for the remote device. You can create up to 16 accounts. 4) Click Add. 5) Enter the Username and Password to authenticate devices to the L2TP/IPSec VPN Server.

6) Click ADD.

Step 2. Configure L2TP/IPSec VPN Connection on Your Remote Device

The remote device can use the Windows or Mac OS built-in L2TP/IPSec software or a third-party L2TP/IPSec software to connect to L2TP/IPSec Server. Here we use the Windows built-in L2TP/IPSec software as an example.

1. Go to	Start > Control Panel > Network and Internet > Network and Sharing Ce	nter.
2. Selec	t Set up a new connection or network.	
3. Selec	t Connect to a workplace and click Next.	

4. Selec	t Use my Internet connection (VPN).	
E Entor	the internet ID address of the router (for example, 210.10.1.7.2) in the	Intornat
o. ⊑nter	the internet IP address of the router (for example: 218.18.1.73) in the	
addre		
	ess field, and select the checkbox Don't connect now; just set it up sect later. Click Next.	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	
	ess field, and select the checkbox Don't connect now; just set it up s	

6. Enter the User name and Password you have set for the L2TP/IPSec VPN server on your router, and click Connect.

7 01:44	Class when the VDN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. CIICK	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	
7. Click	Close when the VPN connection is ready to use	

8. Go to Network and Sharing Center and click Change adapter settings.


VPN Server&Client

ind the VPN	connection y	ou created, tl	nen double-c	click it.	
ind the VPN	connection y	ou created, tl	nen double-d	click it.	
ind the VPN	connection y	ou created, tl	nen double-d	click it.	
ind the VPN	connection y	ou created, tl	nen double-d	click it.	
ind the VPN	connection y	ou created, tl	nen double-d	click it.	

VPN Server&Client

11. Switch to the Security IPSec) and click Advance	tab, select Layer 2 Tunneling ced settings.	Protocol with IPsec (L2TP/
	key for authentication and enter	

Done! Click Connect to start VPN connection.




14. 4. Use VPN Client to Access a Remote VPN Server

VPN Client is used to create VPN connections for devices in your home network to access a remote VPN server.

To use the VPN feature, simply configure a VPN connection and choose your desired devices on your router, then these devices can access the remote VPN server. Please follow the steps below:



- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > VPN Client.
- Note: Firmware update may be required to support VPN Client.
- 3. Enable VPN Client, then save the settings.



- 4. Add VPN servers, and enable the one you need.
 - 1) In the Server List section, click Add.
 - 2) Specify a description for the VPN, and choose the VPN type.

OpenVPN:	Enter the VPN	N username	and passwor	d if reauired	d by vour
provider, o	Enter the VPN therwise simpled by your VPN	ly leave then			
provider, o	therwise simpl	ly leave then			
provider, o	therwise simpl	ly leave then			
provider, o	therwise simpl	ly leave then			

• PPTP: Enter the VPN server address (for example: 218.18.1.73) and the VPN username and password provided by your VPN provider.

	C VPN: Enter ame and pass			
VPN userna				


- 4) Save the settings.
- 5) In the server list, enable the one you need.

and manage the devices that will use the VPN function.	
the Device List section, click Add. hoose and add the devices that will access the VPN server you have conf	figured

6. Save the settings.

Chapter 14

VPN Server&Client



Done! Now the devices you specified can access the VPN server you enabled.

VPN Server&Client

Customize Your Network Settings

This chapter guides you on how to configure advanced network features.

It contains the following sections:

- Change the LAN Settings
- Set Up Link Aggregation
- Configure to Support IPTV Service
- Specify DHCP Server Settings
- Set Up a Dynamic DNS Service Account
- Create Static Routes

15. 1. Change the LAN Settings

The router is preset with a default LAN IP 192.168.0.1, which you can use to log in to its web management page. The LAN IP address together with the Subnet Mask also defines the subnet that the connected devices are on. If the IP address conflicts with another device on your local network or your network requires a specific IP subnet, you can change it.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Network > LAN.
- 3. Type in a new IP Address appropriate to your needs. And leave the Subnet Mask as the default settings.


4. Click SAVE.

Note: If you have set the Port Forwarding, DMZ or DHCP address reservation, and the new LAN IP address is not in the same subnet with the old one, then you should reconfigure these features.

15. 2. Set Up Link Aggregation

The Link Aggregation feature combines two LAN ports together to make a single high-bandwidth data path, thus sustaining a higher-speed and more stable wired network.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Network > LAN.
- 3. Enable Link Aggregation.
- Note: Link Aggregation and IPTV/VLAN cannot be enabled at the same time to avoid LAN port conflicts.



- 4. Select the Static LAG or LACP mode. It's recommended that you select the same link aggregation mode for both ends of the link.
- 5. Click SAVE. The LAN2 and LAN3 ports will be used for Link Aggregation.

15. 3. Configure to Support IPTV Service

I want to:

Configure IPTV setup to enable Internet/IPTV/Phone service provided by my internet service provider (ISP).

How can I do that?


- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Network > IPTV/VLAN.
- **3.** If your ISP provides the networking service based on IGMP technology, e.g., British Telecom(BT) and Talk Talk in UK:

1)	Tick the IGMP Proxy and IGMP Snooping checkbox, then select the IGMP Version Contract Contract
	either V2 or V3, as required by your ISP.

- 2) Click SAVE.
- 3) After configuring IGMP proxy, IPTV can work behind your router now. You can connect your set-top box to any of the router's Ethernet port.

If IGMP is not the technology your ISP applies to provide IPTV service:

- 1) Tick Enable IPTV/VLAN.
 - Note: IPTV/VLAN and Link Aggregation cannot be enabled at the same time to avoid LAN port conflicts.
- 2) Select the appropriate Mode according to your ISP.
 - Select Bridge if your ISP is not listed and no other parameters are required.
 - Select Custom if your ISP is not listed but provides necessary parameters.



- 3) After you have selected a mode, the necessary parameters, including the LAN port for IPTV connection, are predetermined. If not, select the LAN type to determine which port is used to support IPTV service.
- 4) Click SAVE.
- 5) Connect the set-top box to the corresponding LAN port which is predetermined or you have specified in Step 3.

Done!

Your IPTV setup is done now! You may need to configure your set-top box before enjoying your TV.

15. 4. Specify DHCP Server Settings

By default, the DHCP (Dynamic Host Configuration Protocol) Server is enabled and the router acts as a DHCP server; it dynamically assigns TCP/IP parameters to client devices from the IP Address Pool. You can change the settings of the DHCP Server if necessary, and you can reserve LAN IP addresses for specified client devices.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Network > DHCP Server.
- To specify the IP address that the router assigns:

- 1. Tick the Enable checkbox.
- 2. Enter the starting and ending IP addresses in the IP Address Pool.
- 3. Enter other parameters if the ISP offers. The Default Gateway is automatically filled in and is the same as the LAN IP address of the router.
- 4. Click SAVE.
- To reserve an IP address for a specified client device:

1. Click Add in the Address Reservation section.


- 2. Click VIEW CONNECTED DEVICES and select the you device you want to reserve an IP for. Then the MAC Address will be automatically filled in. Or enter the MAC address of the client device manually.
- 3. Enter the IP address to reserve for the client device.
- 4. Click SAVE.

15. 5. Set Up a Dynamic DNS Service Account


Most ISPs assign a dynamic IP address to the router and you can use this IP address to access your router remotely. However, the IP address can change from time to time

and you don't know when it changes. In this case, you might apply the DDNS (Dynamic Domain Name Server) feature on the router to allow you and your friends to access your router and local servers (FTP, HTTP, etc.) using a domain name without checking and remembering the IP address.


- Note: DDNS does not work if the ISP assigns a private WAN IP address (such as 192.168.1.x) to the router.
- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > Network > Dynamic DNS.
- 3. Select the DDNS Service Provider: TP-Link, NO-IP or DynDNS. It is recommended to select TP-Link so that you can enjoy TP-Link's superior DDNS service. Otherwise, please select NO-IP or DynDNS. If you don't have a DDNS account, you have to register first by clicking Register Now.



- Note: To enjoy TP-Link's DDNS service, you have to log in with a TP-Link ID. If you have not logged in with one, click log in.
- 4. Click Register in the Domain Name List if you have selected TP-Link, and enter the Domain Name as needed.

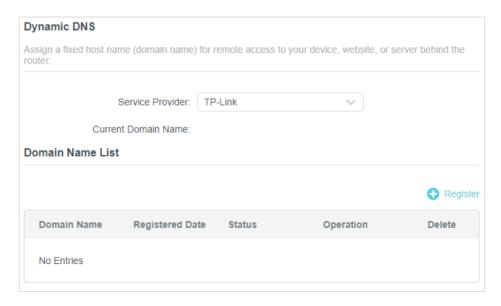

If you have selected NO-IP or DynDNS, enter the username, password and domain name of your account.



5. Click LOGIN AND SAVE.

15. 6. Create Static Routes


Static routing is a form of routing that is configured manually by a network administrator or a user by adding entries into a routing table. The manually-configured routing information guides the router in forwarding data packets to the specific destination.

I want to:

Visit multiple networks and servers at the same time.


For example, in a small office, my PC can surf the internet through Router A, but I also want to visit my company's network. Now I have a switch and Router B. I connect the devices as shown in the following figure so that the physical connection between my PC and my company's server is established. To surf the internet and visit my company's network at the same time, I need to configure the static routing.

[@] Tips: If you want to use a new DDNS account, please click Logout first, and then log in with a new account.

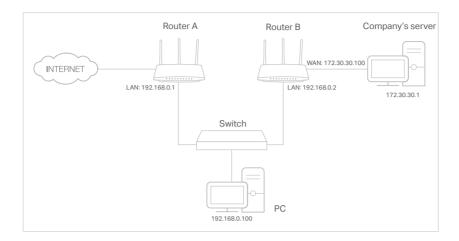

How can I do that?

- 1. Change the routers' LAN IP addresses to two different IP addresses on the same subnet. Disable Router B's DHCP function.
- 2. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for Router A.
- 3. Go to Advanced > Network > Routing.
- 4. Click Add and finish the settings according to the following explanations:



Network Destination: The destination IP address that you want to assign to a static route. This IP address cannot be on the same subnet with the WAN IP or LAN IP of Router A. In the example, the IP address of the company network is the destination IP address, so here enter 172.30.30.1.

Subnet Mask: Determines the destination network with the destination IP address. If the destination is a single IP address, enter 255.255.255.255; otherwise, enter the subnet mask of the corresponding network IP. In the example, the destination network is a single IP, so here enter 255.255.255.255.

Default Gateway: The IP address of the gateway device to which the data packets

5. Click SAVE.

will be sent. This IP address must be on the same subnet with the router's IP which sends out data. In the example, the data packets will be sent to the LAN port of Router B and then to the Server, so the default gateway should be 192.168.0.2.

Interface: Determined by the port (WAN/LAN) that sends out data packets. In the example, the data are sent to the gateway through the LAN port of Router A, so LAN/WLAN should be selected.

Description: Enter a description for this static routing entry.

6.	. Check the Routing Table below. If you can find the entry you've set, the static rout is set successfully.								ıting	

Done!

Open a web browser on your PC. Enter the company server's IP address to visit the company network.

Chapter 16

Manage the Router

This chapter will show you the configuration for managing and maintaining your router. It contains the following sections:

- Update the Firmware
- Backup and Restore Configuration Settings
- Change the Login Password
- Password Recovery
- Local Management
- Remote Management
- System Log
- Test the Network Connectivity
- Set System Time and Language
- Set the Router to Reboot Regularly
- Control the LED

16. 1. Update the Firmware

TP-Link aims at providing better network experience for users.

We will inform you through the web management page if there's any new firmware available for your router. Also, the latest firmware will be released at the TP-Link official website www.tp-link.com, and you can download it from the Support page for free.

Note:

- · Back up your router's configurations before firmware update.
- Do NOT turn off the router during the firmware update.

16. 1. 1. Auto Update

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > Firmware Update.

3. Enable	e Auto Update	Э.		

4. Specify the Update Time and save the settings.

The router will update firmware automatically at the specified time when new version is available.

16. 1. 2. Online Update

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. When the latest firmware is available for your router, the update icon will display in the top-right corner of the page. Click the icon to go to the Firmware Update page.
 Alternatively, you can go to Advanced > System > Firmware Update, and click CHECK FOR UPDATES to see whether the latest firmware is released.

3. Focus on the Online Update section, and click UPDATE if there is new firmware.
4. Wait a few minutes for the update and reboot to complete.
Ø Tips: If there's a new and important firmware update for your router, you will see the prompt notification on your computer as long as a web browser is opened. Click to update, and log in to the web management page with the username and password you set for the router. You will see the Firmware Update page.
16. 1. 3. Local Update
1. Download the latest firmware file for the router from www.tp-link.com .
2. Visit http://tplinkwifi.net , and log in with your TP-Link ID or the password you set for the router.
3. Go to Advanced > System > Firmware Update.
4. Focus on the Local Update section. Click BROWSE to locate the downloaded new firmware file, and click UPDATE.

- 5. Wait a few minutes for the update and reboot to complete.
- Note: If you fail to update the firmware for the router, please contact our Technical Support.

16. 2. Backup and Restore Configuration Settings

The configuration settings are stored as a configuration file in the router. You can backup the configuration file to your computer for future use and restore the router to a previous settings from the backup file when needed. Moreover, if necessary you can erase the current settings and reset the router to the default factory settings.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System Tools > Backup & Restore.
- To backup configuration settings:

backup configurati	on settings.	
	• •	ocal computer. A '.bin' file
restore configurati	ion settings:	
	the backup configuration file stored	d on your computer, and
	ACK UP to save a co current settings will restore configuration	ACK UP to save a copy of the current settings to your locurrent settings will be stored to your computer. restore configuration settings: BROWSE to locate the backup configuration file stored

- 2. Wait a few minutes for the restoring and rebooting.
- Note: During the restoring process, do not turn off or reset the router.
- To reset the router except your login password and TP-Link ID:
- 1. In the Factory Default Restore section, click RESTORE.

Chapter 16	Manage the Router
2. Wait a few minutes for the resetting and rebooting.	
Note:	
 During the resetting process, do not turn off the router. After reset, you can still use the current login password or the TP-Link ID to log in a 	to the web management page.
To reset the router to factory default settings:	
Click FACTORY RESTORE to reset the router.	
1. Olick PAOTON RESTORE to reset the router.	
2. Wait a few minutes for the resetting and rebooting.	
Note:	
 During the resetting process, do not turn off or reset the router. We strongly recommend you backup the current configuration settings before res 	setting the router.
16. 3. Change the Login Password	
The account management feature allows you to change your I	ogin password of the web
management page.	
Note: If you are using a TP-Link ID to log in to the web management page, the acdisabled. To manage the TP-Link ID, go to Advanced > TP-Link ID.	count management feature will be
1. Visit http://tplinkwifi.net , and log in with the password you s	et for the router.
2. Go to Advanced > System > Administration and focus of section.	on the Change Password

3. Enter the old password, then a new password twice (both case-sensitive). Click SAVE.

Chapter 16 Manage the Router

4. Use the new password for future logins.

16. 4. Password Recovery

This feature allows you to recover the login password you set for you router in case you forget it.

- Note: If you are using a TP-Link ID to log in to the web management page, the Password Recovery feature will be disabled. To manage the TP-Link ID, go to Advanced > TP-Link ID.
- 1. Visit http://tplinkwifi.net, and log in with the password you set for the router.
- 2. Go to Advanced > System > Administration and focus on the Password Recovery section.
- 3. Tick the Enable box of Password Recovery.
- 4. Specify a mailbox (From) for sending the recovery letter and enter its SMTP Server address. Specify a mailbox (To) for receiving the recovery letter. If the mailbox (From) to send the recovery letter requires encryption, Tick the Enable box of Authentication and enter its username and password.

0	Τi	ne	
-		μo	

- SMTP server is available for users in most webmail systems. For example, the SMTP server address of Gmail is smtp.gmail.com.
- Generally, Authentication should be enabled if the login of the mailbox requires username and password.

5. Click SAVE.

To recover the login password, please visit http://tplinkwifi.net, click Forgot Password? on the login page and follow the instructions to set a new password.

Chapter 16 Manage the Router

16.5. Local Management

This feature allows you to limit the number of client devices on your LAN from accessing the router by using the MAC address-based authentication.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > Administration and complete the settings In Local Management section as needed.

•	Access the	router via	HTTPS	and HTT	P
---	------------	------------	--------------	---------	---

	e Enable box of Local Management via HTTPS to access the router via HTTP TP, or keep it disabled to access the router only via HTTP.
Allo	ow all LAN connected devices to manage the router:
Select A	All Devices for Local Managers.

- Allow specific devices to manage the router:
- 1. Select All Devices for Local Managers and click SAVE.

Click Add Devic	e.				
	INECTED DEVIC	ES and coloat	the device to n	nanago tho rour	tor fr
	Devices list, or e				
	ription for this en				

16. 6. Remote Management

5. Click SAVE.

Chapter 16

This feature allows you to control remote devices' authority to manage the router.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > Administration and complete the settings in Remote Management section as needed.
- Forbid all devices to manage the router remotely:

Do not tick the Enable checkbox of Remote Management.

Manage the Router

• Allo	ow all devices to man	age the router	remotely:	
1. Tick t	the Enable checkbox	of Remote Man	agement.	
	the HTTPS and HTT een 1024 and 65535		lt settings (recomm	nended) or enter a valu
3. Selec	ct All Devices for Rem	note Managers.		
4 Click	CAVE			

4. Click SAVE.


Chapter 16

Devices on the internet can log in to http://Router's WAN IP address:port number (such as http://113.116.60.229:1024) to manage the router.

@ Tips:

- You can find the WAN IP address of the router on Network Map > Internet.
- The router's WAN IP is usually a dynamic IP. Please refer to <u>Set Up a Dynamic DNS Service Account</u> if you want to log in to the router through a domain name.
- Allow a specific device to manage the router remotely:

Manage the Router



- 1. Tick the Enable checkbox of Remote Management.
- 2. Keep the HTTPS and HTTP port as default settings (recommended) or enter a value between 1024 and 65535.
- 3. Select Specified Device for Remote Managers.
- 4. In the Only this IP Address field, enter the IP address of the remote device to manage the router.
- 5. Click SAVE.

Devices using this WAN IP can manage the router by logging in to http://Router's WAN IP:port number (such as http://113.116.60.229:1024).

Ø Tips: The router's WAN IP is usually a dynamic IP. Please refer to Set Up a Dynamic DNS Service Account if you want to log in to the router through a domain name.

16.7. System Log

When the router does not work normally, you can save the system log and send it to the technical support for troubleshooting.

- To save the system log locally:
- 1. Visit http://tplinkwifi.net, and log in your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > System Log.
- 3. Choose the type and level of the system logs as needed.


4. In the	Save Log section, click SAVE TO LOCAL to save the system logs to a loc	cal disk.
• To se	end the system log to a mailbox at a fixed time:	
however	mple, I want to check my router's working status at a fixed time ever, it's too troublesome to log in to the web management page every time tecking. It would be great if the system logs could be sent to my mails	e I want
a.m. eve		
1. Visit <u>h</u> the ro	uttp://tplinkwifi.net, and log in with your TP-Link ID or the password you uter.	ı set for
2. Go to	Advanced > System Tools > System Log.	

3. In the Save Log section, click MAIL LOG.

4. Enter the information required:

Chapter 16

Manage the Router



- 1) Email From: Enter the email address used for sending the system log.
- 2) Select Require Password.
- Tips: Generally, Require Password should be selected if the login of the mailbox requires username and password.
- 3) Username: Enter the email address used for sending the system log.
- 4) Email Password: Enter the password to login the sender's email address.
- 5) SMTP Server: Enter the SMTP server address.
- Tips: SMTP server is available for users in most webmail systems. For example, the SMTP server address of Hotmail is smtp-mail.outlook.com.
- 6) Email To: Enter the recipient's email address, which can be the same as or different from the sender's email address.
- 7) Select Mail Log Automatically.
- Fips: The router will send the system log to the designated email address if this option is enabled.
- 8) Frequency: This determines how often the recipient will receive the system log. 5. Click SAVE.

16. 8. Test the Network Connectivity

Diagnostics is used to test the connectivity between the router and the host or other network devices.

2. Go to	Advanced > System > Diagnostics.
3. Ente	the information:
1)	Choose Ping or Traceroute as the diagnostic tool to test the connectivity;
•	Ping is used to test the connectivity between the router and the tested host, and measure the round-trip time.
•	Traceroute is used to display the route (path) your router has passed to reach the tested host, and measure transit delays of packets across an Internet Protocol network.
2)	Enter the IP Address or Domain Name of the tested host.
3)	Modify the Ping Count number and the Ping Packet Size. It's recommended to keep the default value.
4)	If you have chosen Traceroute, you can modify the Traceroute Max TTL. It's recommended to keep the default value.
4. Click	START to begin the diagnostics.
	ure below indicates the proper connection between the router and the Yahoo (www.Yahoo.com) tested through Ping.

The figure below indicates the proper connection between the router and the Yahoo server (www.Yahoo.com) tested through Traceroute.
16. 9. Set System Time and Language
System time is the time displayed while the router is running. The system time you configure here will be used for other time-based functions like Parental Controls. You can choose the way to obtain the system time as needed.
System language is the language displayed when you log into the router. You car change the system language as needed.
 Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set fo the router.
2. Go to Advanced > System > Time & Language.
To get time from the internet:
1. Enable 24-Hour Time if you want the time to display in a 24-hour way.
2. In the Set Time field, select Get from Internet.

3. Select your local Time Zone from the drop-down list.

Chapter 16 Manage the Router

4. In the NTP Server I field, enter the IP address or domain name of your desired NTP Server.

- 5. (Optional) In the NTP Server II field, enter the IP address or domain name of the second NTP Server.
- 6. Click SAVE.

•	To	get	time	from	your	com	puter:
---	----	-----	------	------	------	-----	--------

1. In the	Set Time field, select Get from Managing Device.
2. The ti	me of your computer will then be displayed and click SAVE.
• To n	nanually set the date and time:
1. In the	Set Time field, select Manually.


- 2. Set the current Date (In MM/DD/YYYY format).
- 3. Set the current Time (In HH/MM/SS format).
- 4. Click SAVE.
- To set Daylight Saving Time:
- 1. Tick the Enable box of Daylight Saving Time.

Chapter 16	Manage the Router
Select the correct Start date and time when d time zone.	aylight saving time starts at your local
3. Select the correct End date and time when d time zone.	aylight saving time ends at your local
4. Click SAVE.	
To set system language:	
Select the language from the dropdown list, ther	n click SAVE.

16. 10. Set the Router to Reboot Regularly

The Scheduled Reboot feature cleans the cache to enhance the running performance of the router.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > Reboot.
- 3. Tick the Enable box of Reboot Schedule.



- 4. Specify the Reboot Time when the router reboots and Repeat to decide how often it reboots.
- 5. Click SAVE.

16. 11. Control the LED

The LED of the router indicates its activities and status. You can enable the Night Mode feature to specify a time period during which the LED is off.

- 1. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced > System > LED Control.
- 3. Enable Night Mode.
- 4. Specify the LED off time, and the LED will be off during this period every day.
- 5. Click SAVE.



Q1. What should I do if I forget my wireless password?

The default wireless password is printed on the label of the router. If the password has been altered:

- 1. Connect your computer to the router using an Ethernet cable.
- 2. Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 3. Go to Wireless to retrieve or reset your wireless password.

Q2. What should I do if I forget my web management password?

- If you are using a TP-Link ID to log in, or you have enabled the Password Recovery feature of the router, click Forgot password on the login page and then follow the instructions to reset it.
- Alternatively, press and hold the Reset button of the router until the Power LED blinks
 to restore factory default settings, and then visit http://tplinkwifi.net to create a new
 login password.

Note:

- Please refer to Password Recovery to learn how to configure Password Recovery.
- You'll need to reconfigure the router to surf the internet once the router is reset, and please mark down your new password for future use.


Q3. What should I do if I can't log in to the router's web management page?

This can happen for a variety of reasons. Please try the methods below to log in again.

- Make sure your computer is connected to the router correctly and the corresponding LED indicator(s) light up.
- Make sure the IP address of your computer is configured as Obtain an IP address automatically and Obtain DNS server address automatically.
- Make sure http://tplinkwifi.net or http://192.168.0.1 is correctly entered.
- Check your computer's settings:
 - Go to Start > Control Panel > Network and Internet, and click View network status and tasks.
 - 2) Click Internet Options on the bottom left.
 - 3) Click Connections and select Never dial a connection.

4) Click LAN	settings and deselect the following three options a	nd click OK.

5) Go to Advanced > Restore advanced settings, click OK to save the settings.



- Use another web browser or computer to log in again.
- Reset the router to factory default settings and try again. If login still fails, please contact the technical support.

Note: You'll need to reconfigure the router to surf the internet once the router is reset.

Q4. What should I do if I can't access the internet even though the configuration is finished?

- Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
- 2. Go to Advanced> Network > Status to check internet status:

If IP Address is a valid one, please try the methods below and try again:

- Your computer might not recognize any DNS server addresses. Please manually configure the DNS server.
 - 1) Go to Advanced > Network > DHCP Server.
 - 2) Enter 8.8.8.8 as Primary DNS, click SAVE.
 - Tips: 8.8.8.8 is a safe and public DNS server operated by Google.

• Resta	art the modem and the router.	
1)	Power off your modem and router, and leave them off for 1 minute.	
2)	Power on your modem first, and wait about 2 minutes until it gets a sol or Internet light.	id cable
3)	Power on the router.	
4)	Wait another 1 or 2 minutes and check the internet access.	
• Reset	t the router to factory default settings and reconfigure the router.	
• Upgra	ade the firmware of the router.	
	k the TCP/IP settings on the particular device if all other devices can get the router.	internet
	picture below shows, if the IP Address is 0.0.0.0, please try the method	s helow
and try		o below

- Make sure the physical connection between the router and the modem is proper.
- Clone the MAC address of your computer.

	for the router.
2)	Go to Internet or Advanced > Network > Internet and focus on the MAC Clon section.
3)	Choose an option as needed (enter the MAC address if Use Custom MAC Address is selected), and click SAVE.
Ø Ti	ps:
t	Some ISP will register the MAC address of your computer when you access the internet for the first time through their Cable modem, if you add a router into your network to share your internet connection, the ISP who taccept it as the MAC address is changed, so we need to clone your computer's MAC address to the router
• 7	The MAC addresses of a computer in wired connection and wireless connection are different.
odif	ry the LAN IP address of the router.
No	te:
rang can't	t TP-Link routers use 192.168.0.1/192.168.1.1 as their default LAN IP address, which may conflict with the le of your existing ADSL modem/router. If so, the router is not able to communicate with your modem and you access the internet. To resolve this problem, we need to change the LAN IP address of the router to avoid conflict, for example, 192.168.2.1.
1)	Visit http://tplinkwifi.net , and log in with your TP-Link ID or the password you see
•	for the router.
2)	Go to Advanced > Network > LAN.
3)	Modify the LANIP address as the follow picture shows. Here we take 192.168.2.
	as an example.
4)	Click SAVE.

1) Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set

- 1) Power off your modem and router, and leave them off for 1 minute.
- 2) Power on your modem first, and wait about 2 minutes until it get a solid cable or Internet light.
- 3) Power on the router.
- 4) Wait another 1 or 2 minutes and check the internet access.
- Double check the internet connection type.
 - 1) Confirm your internet connection type, which can be learned from the ISP.
 - 2) Visit http://tplinkwifi.net, and log in with your TP-Link ID or the password you set for the router.
 - 3) Go to Advanced > Network > Internet.
 - 4) Select your Internet Connection Type and fill in other parameters.
 - 5) Click SAVE.
 - 6) Restart the modem and the router again.
- Please upgrade the firmware of the router.

If you've tried every method above but still cannot access the internet, please contact the technical support.

Q5. What should I do if I can't find my wireless network or I cannot connect the wireless network?

If you fail to find any wireless network, please follow the steps below:

 Make sure the wireless function of your device is enabled if you're using a laptop with built-in wireless adapter. You can refer to the relevant document or contact the laptop manufacturer.


- Make sure the wireless adapter driver is installed successfully and the wireless adapter is enabled.
 - On Windows 7
 - 1) If you see the message No connections are available, it is usually because the wireless function is disabled or blocked somehow.
 - 2) Click Troubleshoot and windows might be able to fix the problem by itself.
 - On Windows XP
 - If you see the message Windows cannot configure this wireless connection, this is usually because windows configuration utility is disabled or you are running another wireless configuration tool to connect the wireless.
 - 2) Exit the wireless configuration tool (the TP-Link Utility, for example).
 - 3) Select and right click on My Computer on desktop, select Manage to open Computer Management window.
 - 4) Expand Services and Applications > Services, find and locate Wireless Zero Configuration in the Services list on the right side.
 - 5) Right click Wireless Zero Configuration, and then select Properties.
 - 6) Change Startup type to Automatic, click on Start button and make sure the Service status is Started. And then click OK.

If you can find other wireless network except your own, please follow the steps below:

- Check the WLAN LED indicator on your wireless router/modem.
- Make sure your computer/device is still in the range of your router/modem. Move it closer if it is currently too far away.
- Go to Wireless or Advanced > Wireless > Wireless Settings, and check the wireless settings. Double check your wireless Network Name and SSID is not hided.

If you can find your wireless network but fail to connect, please follow the steps below:

- Authenticating problem/password mismatch:
 - Sometimes you will be asked to type in a PIN number when you connect to the wireless network for the first time. This PIN number is different from the Wireless Password/Network Security Key, usually you can only find it on the label of your router.



- If you cannot find the PIN or PIN failed, you may choose Connecting using a security key instead, and then type in the Wireless Password/Network Security Key.
- 3) If it continues to show note of Network Security Key Mismatch, it is suggested to confirm the wireless password of your wireless router.

Note: Wireless Password/Network Security Key is case sensitive.

- Windows unable to connect to XXXX / Can not join this network / Taking longer than usual to connect to this network:
 - Check the wireless signal strength of your network. If it is weak (1~3 bars), please move the router closer and try again.
 - Change the wireless Channel of the router to 1, 6 or 11 to reduce interference from other networks.
 - Re-install or update the driver for your wireless adapter of the computer.

FCC compliance information statement



Product Name: AX5400 Wi-Fi 6 Router

Model Number: Archer AX73

Component Name	Model
I.T.E. Power Supply	T120200-2B1

Responsible party:

TP-Link USA Corporation

Address: 10 Mauchly, Irvine, CA 92618 Website: http://www.tp-link.com/us/

Tel: +1 626 333 0234 Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference.
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

FCC compliance information statement

Product Name: I.T.E. Power Supply Model Number: T120200-2B1

Responsible party:

TP-Link USA Corporation

Address: 10 Mauchly, Irvine, CA 92618 Website: http://www.tp-link.com/us/

Tel: +1 626 333 0234 Fax: +1 909 527 6804

E-mail: sales.usa@tp-link.com

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

• Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference.
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

We, **TP-Link USA Corporation**, has determined that the equipment shown as above has been shown to comply with the applicable technical standards, FCC part 15. There is no unauthorized change is made in the equipment and the equipment is properly maintained and operated.

Issue Date: 2024-12-05

CE Mark Warning



This is a class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

OPERATING FREQUENCY(the maximum transmitted power)

2400 MHz -2483.5 MHz (20dBm)

5150 MHz -5250 MHz (23dBm)

5250 MHz -5350 MHz (23dBm)

5470 MHz -5725 MHz (30dBm)

Power Supply

Model	Manufacturer
T120200-2C1	TP-Link Technologies Co., Ltd.

EU Declaration of Conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of directives 2014/53/EU, 2009/125/EC, 2011/65/EU and (EU)2015/863.

The original EU Declaration of Conformity may be found at https://www.tp-link.com/en/support/ce/

RF Exposure Information

This device meets the EU requirements (2014/53/EU Article 3.1a) on the limitation of exposure of the general public to electromagnetic fields by way of health protection.

The device complies with RF specifications when the device used at 20 cm from your body.

National Restrictions

Attention: This device may only be used indoors in all EU member states, EFTA countries and Northern Ireland.



UKCA Mark



UK Declaration of Conformity

TP-Link hereby declares that the device is in compliance with the essential requirements and other relevant provisions of the Radio Equipment Regulations 2017.

The original UK Declaration of Conformity may be found at https://www.tp-link.com/support/ukca

National Restrictions

Attention: This device may only be used indoors in Great Britain.



Canadian Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Caution:

1. The device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;

DFS (Dynamic Frequency Selection) products that operate in the bands 5250-5350 MHz, 5470-5600MHz, and 5650-5725MHz.

Avertissement:

1.Le dispositif fonctionnant dans la bande 5150-5250 MHz est réservé uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux:

Les produits utilisant la technique d'atténuation DFS (sélection dynamique des fréquences) sur les bandes 5250-5350 MHz, 5470-5600MHz et 5650-5725MHz.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)

Korea Warning Statements:

당해 무선설비는 운용증 전파혼신 가능성이 있음.

NCC Notice & BSMI Notice:

注意!

取得審驗證明之低功率射頻器材,非經核准,公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信;經發現有干擾現象時,應立即停用,並改善至無干擾時方得繼續使用。

前述合法通信,指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

應避免影響附近雷達系統之操作。

高增益指向性天線只得應用於固定式點對點系統。

安全諮詢及注意事項

• 請使用原裝電源供應器或只能按照本產品注明的電源類型使用本產品。

- 清潔本產品之前請先拔掉電源線。請勿使用液體、噴霧清潔劑或濕布進行 清潔。
- 注意防潮,請勿將水或其他液體潑灑到本產品上。
- 插槽與開口供通風使用,以確保本產品的操作可靠並防止過熱,請勿堵塞 或覆蓋開口。
- 請勿將本產品置放於靠近熱源的地方。除非有正常的通風,否則不可放在密閉位置中。
- 請不要私自打開機殼,不要嘗試自行維修本產品,請由授權的專業人士進行此項工作。

限用物質含有情況標示聲明書

設備名稱:AX5400 Wi-Fi 6 Router 型號(型式):Archer AX73 Equipment name Type designation (Type)						
			限	用物質及其化學	符號	
			Restricted subs	stances and its o	chemical symbols	
單元 Unit	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr+6)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
РСВ	0	0	0	0	\circ	0
外殼	0	0	0	0	0	0
電源供應器	_		0	0		0
天線			\bigcirc	\bigcirc	0	0

備考1. `超出0.1 wt %′及 `超出0.01 wt %′係指限用物質之百分比含量超出百分比含量基準值

Note 1: "Exceeding 0.1 wt %" and "exceeding 0.01 wt %" indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.

備考2. ヾ○′ 係指該項限用物質之百分比含量未超出百分比含量基準值。

Note 2: "O" indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.

備考3. 》一《係指該項限用物質為排除項目。

Note 3: The "-" indicates that the restricted substance corresponds to the exemption.

USB端口額定負載: 5V/0.9A



Продукт сертифіковано згідно с правилами системи УкрСЕПРО на відповідність вимогам нормативних документів та вимогам, що передбачені чинними законодавчими актами України.



Safety Information

- Keep the device away from water, fire, humidity or hot environments.
- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use damaged charger or USB cable to charge the device.
- Do not use any other chargers than those recommended
- Do not use the device where wireless devices are not allowed.
- Adapter shall be installed near the equipment and shall be easily accessible.
- Use only power supplies which are provided by manufacturer and in the original packing of this product. If you have any questions, please don't hesitate to contact us.
- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- This product uses radios and other components that emit electromagnetic fields. Electromagnetic fields and magnets may interfere with pacemakers and other implanted medical devices. Always keep the product and its power adapter more than 15 cm (6 inches) away from any pacemakers or other implanted medical devices. If you suspect your product is interfering with your pacemaker or any other implanted medical device, turn off your product and consult your physician for information specific to your medical device.

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

Explanations of the symbols on the product label

Note: The product label can be found at the bottom of the product and its I.T.E. power supply. Symbols may vary from products.


Symbol	Explanation
	Class II equipment
Ē	Class II equipment with functional earthing
\sim	Alternating current
===	Direct current
♦- ••	Polarity of d.c. power connector
	For indoor use only
4	Dangerous voltage

Symbol	Explanation
4	Caution, risk of electric shock
	Energy efficiency Marking
	Protective earth
<u>_</u>	Earth
	Frame or chassis
4	Functional earthing
	Caution, hot surface
<u> </u>	Caution
0 0 11	Operator's manual
()	Stand-by
	"ON"/"OFF" (push-push)
	Fuse
₩ N	Fuse is used in neutral N
	RECYCLING This product bears the selective sorting symbol for Waste electrical and electronic equipment (WEEE). This means that this product must be handled pursuant to European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment. User has the choice to give his product to a competent recycling organization or to the retailer when he buys a new electrical or electronic equipment.
	Caution, avoid listening at high volume levels for long periods
	Disconnection, all power plugs
m	Switch of mini-gap construction

Symbol	Explanation
μ	Switch of micro-gap construction (for US version) Switch of micro-gap / micro-disconnection construction (for other versions except US)
3	Switch without contact gap (Semiconductor switching device)

Appendix: 定位您的路由器

- 產品不應放置在會受潮濕或過高溫度的地方。
- 將路由器放置在能夠連接多個設備並接上電源的地方。
- 請確保線和電源線放置在安全位置,以免造成絆倒的危險。
- 路由器可以放置在架子上或桌面上。
- 將路由器遠離具有強烈電磁干擾的設備,例如藍牙設備、無線電話和微波爐。
- 通常,路由器放置在水平的表面上,例如在架子上或桌面上。該設備還可以安裝在牆上,如下圖所示。

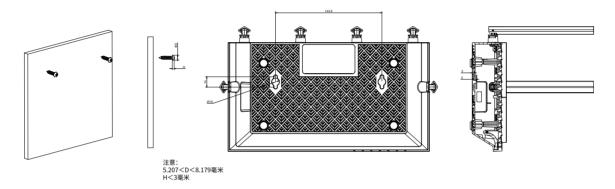

▶注意:

螺絲頭直徑為5.207mm<D<8.179mm,兩個螺絲之間的距離為143.9mm。從牆壁突出的螺絲需要約5mm的基底,並且螺絲的長度至少需要20mm才能承受產品的重量。